


ML with Half Current

(Summary of Chris's report)

As of Aug.22.2006

Assumptions

- 1 klystron drives 6 cryomodules
- Install only every other RF (baseline) unit in the service tunnel
- All penetrations to accelerator tunnel built (additional 36m waveguide)

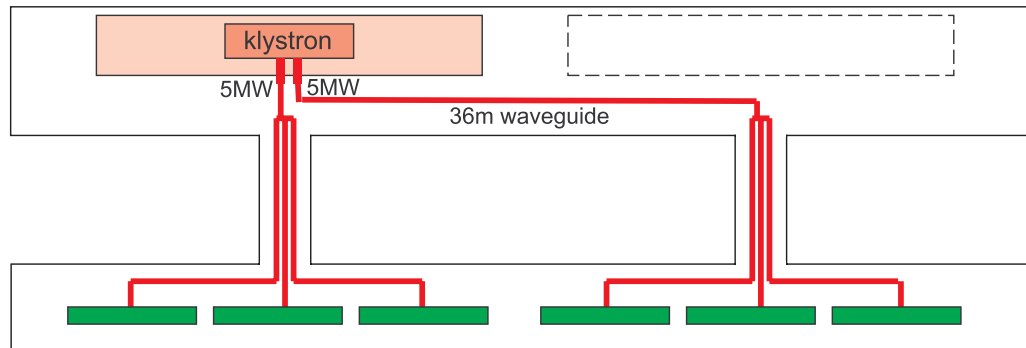

- Cavity fill time 0.565ms \rightarrow 1.130ms (RF pulse 1.565 \rightarrow 2.130ms)